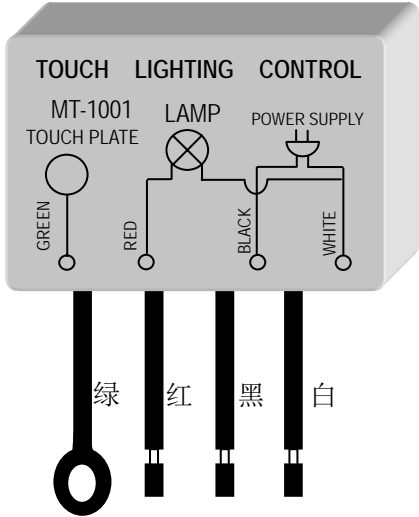
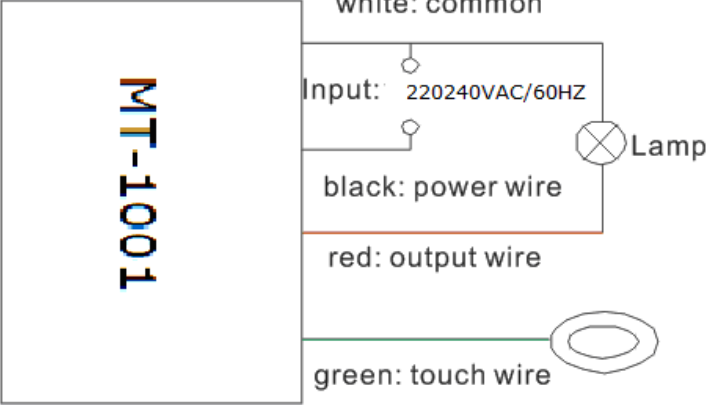


# MT-1001

<b>Touch Lighting controller</b>		<b>No.</b>	<b>ED-03-2009A0-1001</b>
<b>Client</b>		<b>Model</b>	<b>MT-1001</b>
<b>Client code</b>		<b>Date</b>	
<b>Size</b>	<b>49.5×35×15.5mm</b>	<b>Color</b>	<b>Black</b>
		<b>Wiring</b>	
			
Wire size	G	1015/18 <sup>#</sup>	<p>White wire is the common wire for lamp and power supply; black wire connects to another wire of power supply, red wire connects with another wire of lamp; green wire connects with the metal part of lamp</p> <p>Note: Please connect as per request, otherwise damage will be caused.</p>
	R	1015/20 <sup>#</sup>	
	B	1015/20 <sup>#</sup>	
	W	1015/20 <sup>#</sup>	
Function	<p>4 steps dimming: A little bright/1<sup>st</sup> touch; brighter/2<sup>nd</sup> touch; brightest/3<sup>rd</sup> touch, off/4<sup>th</sup> touch</p>		
Input Voltage	220~240V/60Hz	Maximum Loading	Incandescent lamp 150W/120V
Voltage tolerance	1500V AC/1mA/60s		Terminal wire & power supplywire
Certificate	CE		
Application	Suitable for lamp with metal body such as desk lamp, floor lamp and deside lamp etc		